

28 Ports Full Gigabit Managed Ethernet Switch

24*GE +4*Combo Ports Managed Ethernet Switch



- 24*10/100/1000M RJ45 + 4*100/1000M Combo Port Ethernet Switch,
- Comply with IEEE 802.3, IEEE 802.3u, IEEE802.3ab, IEEE802.3z standards;
- Support QOS, STP/RSTP, IGMP, DHCP, SNMP, WEB, VLAN, ERPS etc.;
- Support connection with IP Cameras and wireless AP.
- Plug and play, no need more configuration.
- Low power consumption design. Low power consumption design. Energy-saving and green. Max total power consumption < 15W.
- 3 years warranty.

RoHS **FC** **CE**

Introduction

The SFT2924GM series is a gigabit L2+ managed ethernet fiber switch. It has 4*100/1000 combo ports and 24*10/100/1000Base-T RJ45 ports.

The SFT2924GM has the L2+ full network management, support IPV4/IPV6 management, static route full line rate forwarding, security protection mechanism, complete ACL/QoS policy and rich VLAN functions, and is easy to manage and maintain. Supports multiple network redundancy protocols STP/RSTP/MSTP (<50ms) and (ITU-T G.8032) ERPS to improve link backup and network reliability. When one-way network fails, communication can be quickly restored to ensure important Uninterrupted communication for applications.

TECHNICAL SPECIFICATION

Model	SFT2924GM
Fixed Port	24*10/100/1000Base-T/TX RJ45 ports (Data) 4*Combo ports (Data) 1 * RS232 console port (115200, N,8,1)
Ethernet Port	10/100/1000Base-T(X), Auto-Detection, Full/half duplex MDI/MDI-X self-adaption


Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP (≤100 meter) 100BASE-TX: Cat5 or later UTP (≤100 meter) 1000BASE-T: Cat5e or later UTP (≤100 meter)
SFP Slot Port	Gigabit SFP optical fiber interface, default matching optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC)
Optical Cable	Multi-mode: 850nm 0 ~ 550M, single mode: 1310nm 0 ~ 40KM, 1550nm 0 ~ 120KM.
Network Management Type	L2+
Network Protocol	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u 100Base-TX; IEEE802.3ab 1000Base-T; IEEE802.3z 1000base-X; IEEE802.3x.
Forwarding Mode	Store and Forward
Switching Capacity	56Gbps (Non-blocking)
Forwarding Rate	26.78Mpps
MAC	8K
Buffer Memory	6M
Jumbo Frame	9.6K
LED Indicator	Power indicator: PWR (Green); Network indicator: 1-28port 100M-(Link/Act)/ (Orange),1000M-(Link/Act)/ (Green); SYS:(Green)
Reset Switch	Yes, One-button factory reset
Power Supply	Built-in power supply, AC 100~220V 50-60Hz
Operation TEMP / Humidity	-20~+55°C, 5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+75°C, 5%~95% RH Non condensing
Dimension (L*W*H)	440*290*45mm
Net /Gross Weight	<4.5kg / <5kg

Installation	Desktop, 19-inch 1U cabinet
Protection	IEC61000-4-2(ESD): $\pm 8\text{kV}$ contact discharge, $\pm 15\text{kV}$ air discharge IEC61000-4-5(Lightning protection/Surge): Power:CM $\pm 4\text{kV}$ /DM $\pm 2\text{kV}$; Port: $\pm 4\text{kV}$
Protection Level	IP30
Certification	CCC, CE mark, commercial; CE/LVD EN60950; FCC Part 15 Class B; RoHS
Warranty	3 years, lifelong maintenance.
Interface	IEEE802.3X (Full-duplex) Port temperature protection setting Port green Ethernet Energy-saving setting Broadcast storm control based on port speed The speed limit of the message flow in the access port. The minimum particle size is 64Kbps.
Layer 3 Features	L2+ network management, IPV4/IPV6 management L3 soft routing forwarding, Static route, Default route @ 128 pcs, APR @ 1024 pcs
VLAN	4K VLAN based on port, IEEE802.1q VLAN based on the protocol VLAN based on MAC Voice VLAN, QinQ configuration Port configuration of Access, Trunk, Hybrid
Port Aggregation	LACP, Static aggregation Max 9 aggregation groups and 8 ports per group.
Spanning Tree	STP (IEEE802.1d), RSTP (IEEE802.1w), MSTP (IEEE802.1s)
Industrial Ring	G.8032 (ERPS), Recovery time less than 20ms
Network Protocol	250 Ring at most, Max 254 devices per ring.
Multicast	MLD Snooping v1/v2, Multicast VLAN IGMP Snooping v1/v2, Max 250 multicast groups, Fast log out
Port Mirroring	Bidirectional data mirroring based on port

QoS	<p>Flow-based Rate Limiting</p> <p>Flow-based Packet Filtering</p> <p>8*Output queues of each port</p> <p>802.1p/DSCP priority mapping</p> <p>Diff-Serv QoS, Priority Mark/Remark</p> <p>Queue Scheduling Algorithm (SP, WRR, SP+WRR)</p>
ACL	<p>Port-based Issuing ACL, ACL based on port and VLAN</p> <p>L2 to L4 packet filtering, matching first 80 bytes message. Provide ACL based on MAC, Destination MAC address, IP Source, Destination IP, IP Protocol Type, TCP/UDP Port, TCP/UDP Port Range, and VLAN, etc.</p>
Security	<p>IP-MAC-VLAN-Port binding</p> <p>ARP inspection, Anti-DoS attack</p> <p>AAA & RADIUS, MAC learning limit</p> <p>Mac black holes, IP source protection</p> <p>IEEE802.1X & MAC address authentication</p> <p>Broadcast storm control, Backup for host datum</p> <p>SSH 2.0, SSL, Port isolation, ARP message speed limit</p> <p>User hierarchical management and password protection</p>
DHCP	<p>DHCP Client, DHCP Snooping, DHCP Server, DHCP Relay</p>
Management	<p>One-key recovery</p> <p>Cable Diagnose, LLDP</p> <p>Web Management (HTTPS)</p> <p>NTP, System work log, Ping Test</p> <p>CPU instant utilization status view</p> <p>Console/AUX Modem/Telnet/SSH2.0 CLI</p> <p>Download & Management on FTP, TFTP, Xmodem, SFTP, SNMP V1/V2C/V3</p> <p>NMS - smart network management system platform (LLDP+SNMP)</p>

<p>System</p>	<p>Category 5 Ethernet network cable</p> <p>Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42 or higher, Microsoft Internet Explorer10 or later;</p> <p>TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, or Mac OS X) installed on each computer in a network</p>
---------------	---

DIMENSION

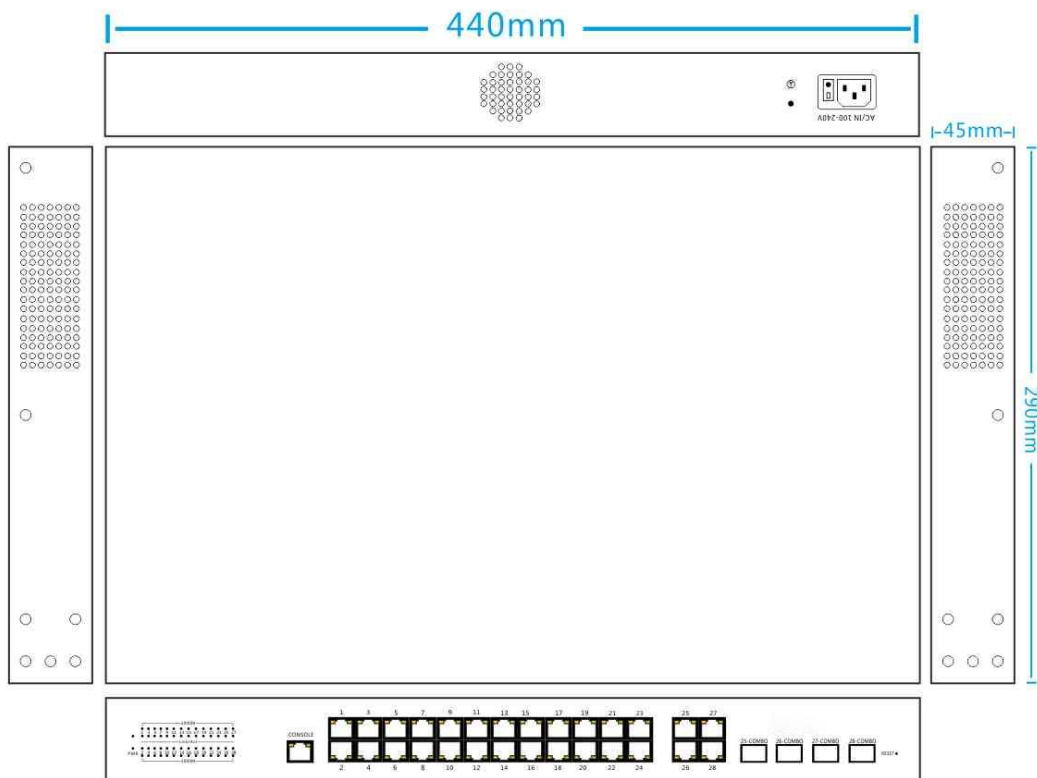

APPLICATION



PACKING LIST

CONTENT	QTY	UNIT
28 Ports Full Gigabit Managed Ethernet Switch (SFT2924GM)	1	SET
Hanging Ear	1	PAIR
User Guide	1	PC
Warranty Card	1	PC